


## Start or stop SQL Boost

You can stop or start the SQL Boost service from the System tray icon by right-clicking the icon, and then selecting **Start SQL Boost** or **Stop SQL Boost**.

You can also access this functionality through the SQL Boost Control Console window by clicking **Settings and Control**. SQL Boost displays the SQL Boost Settings and Control window as shown in the following image.

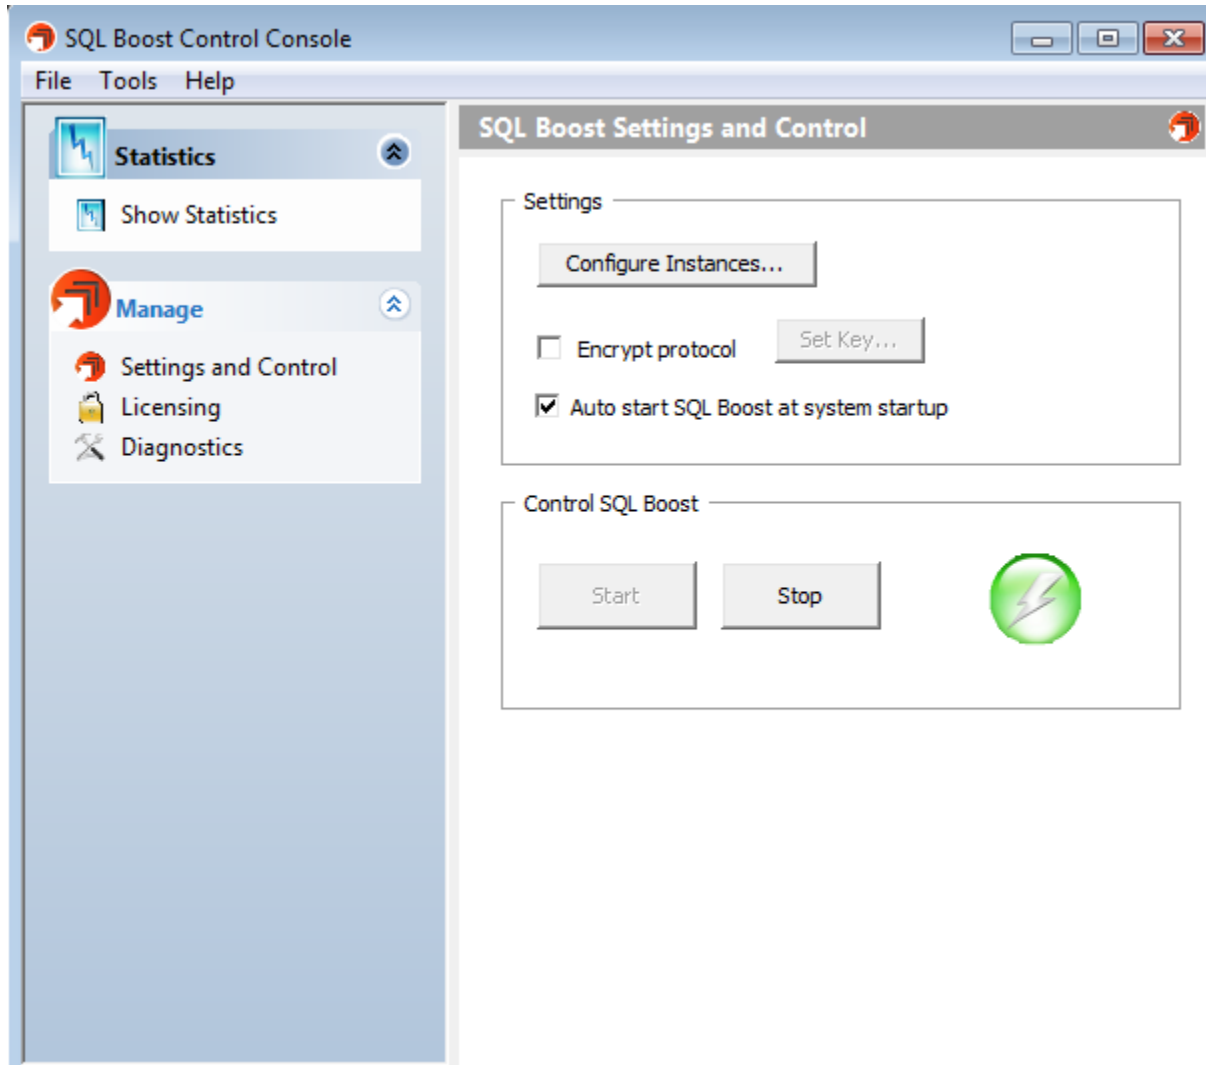

**To start SQL Boost**, click **Start**. Note that the icon in the **Control SQL Boost** box changes from red to green.

**To stop SQL Boost**, click **Stop**. The system displays a confirmation message to make sure you want to stop the service. Click **Yes** to continue. Note that the icon in the **Control SQL Boost** box changes from green to red.



## Available options

Note that the **Start** button is available only when SQL Boost service is stopped, and the **Stop** button is available only when SQL Boost service is started.

Need more help? [Search the IDERA Customer Support Portal](#)

<a href="#">IDERA Website</a>	<a href="#">Products</a>	<a href="#">Purchase</a>	<a href="#">Support</a>	<a href="#">Community</a>	<a href="#">About Us</a>	<a href="#">Resources</a>	<a href="#">Legal</a>
-------------------------------	--------------------------	--------------------------	-------------------------	---------------------------	--------------------------	---------------------------	-----------------------